CANNON C8

HIGH FIDELITY COAXIAL SPEAKER ENCLOSURE

SOUND

FEATURES

- 8" Coaxial Transducer
- 7" Passive Radiator
- Bass Response Down to 55 Hz
- $90^{\circ} \times 60^{\circ}$ Coverage Pattern
- 2-Circuit Input Selector Switch
- IP55 + Salt Water Resistant

APPLICATIONS

- Restaurants
- Monitors
- Front Fills
- Outdoor Systems



DESCRIPTION


The C8 is the largest and most powerful Cannon Coaxial model. C8 utilizes an 8" low-frequency driver with a concentricallymounted compression driver, the latter coupled with a $90^{\circ} \times 60^{\circ}$ wave guide, to help focalize the coverage where it is needed and reduce reflections from ceilings or overhangs. The enclosure also incorporates a rear-facing 7" passive radiator specifically tuned to extend the bass frequency response. These features allow the C8 to provide a full-range bandwidth and up to 120 dB SPL, all with high-fidelity sound quality.


The C8 has two Speakon connectors and a 2-circuit switch, which allows for a choice between two different amplified signals via a single, 4-conductor cable. The C8 is also available in the C8i installation version which features a screw terminal block connector.

SPECIFICATIONS

Audio Specifications		Mechanical Specifications	
Description:	Passive 8" coaxial with a 7" passive radiator	IP Rating:	IP55 indoor/outdoor and salt water resistant
Bandwidth:	55 Hz - 18 kHz (-6 dB)	Rigging:	(4) M6 points
Max SPL:	120 dB SPL @ 1 m w/ preset	Weight:	12 lb / 5.4 kg
Power:	400 watts (program), 200 watts (AES)		Finland birch plywood (urea glue), structural stainless steel inte- rior, polyurea, matte salt and UV resistant coating, 316 stainless steel hardware, 3D spacer mesh fabric
Directivity:	90° horizontal × 60° vertical		
Elements:	(1) 8" coaxial with a compression driver high frequency element, (1) 7" passive radiator	Dimensions:	10.2" (260 mm) x 10.2" (260 mm) x 10.2" (260 mm)
Impedance:	8 Ω	Colors:	Stocking black and white, custom colors and fabrics available
Connectors:	(2) NL4, 1+1- (circuit 1), 2+2- (circuit 2) with input selector switch, (1) Neutrik NDL dummyPLUG	Accessories:	C-Clamp (wall, truss, mic stand, ceiling mounting), L-Bracket, Mounting Plate, Pole Mount Adaptor, Tube Mount

DIRECTIVITY

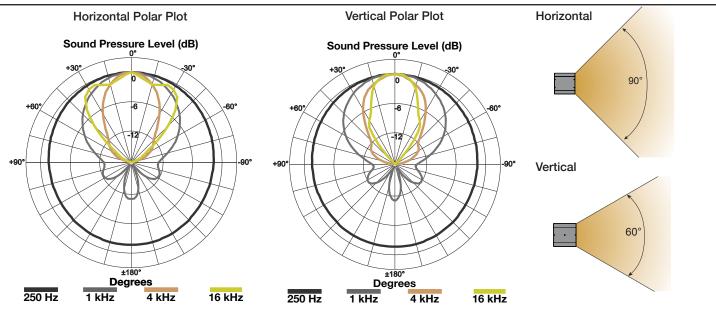

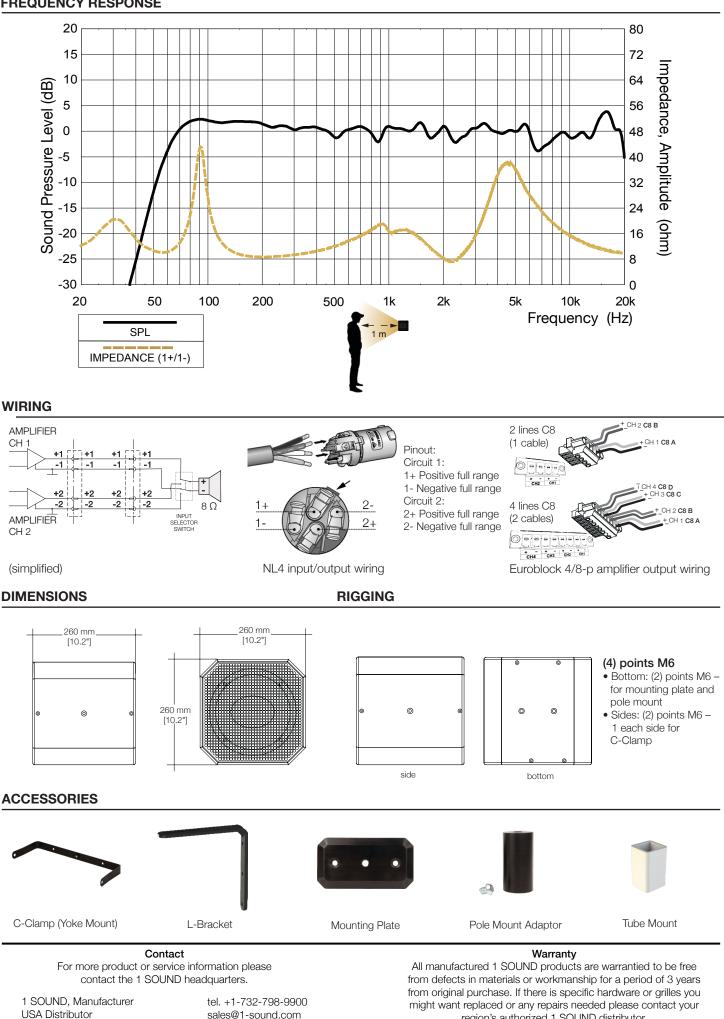

1 SOUND - © 2022 - ALL RIGHTS RESERVED

34 Apple Street Tinton Falls, NJ 07724

www.1-sound.com

Made in USA

region's authorized 1 SOUND distributor.

TECHNICAL DATA SHEET